


# TUNEFUL CORPORATION

## RF DIVISION

Microwave Power Divider with SMA connector from 1 to 12.4 GHz—  
basic outline:

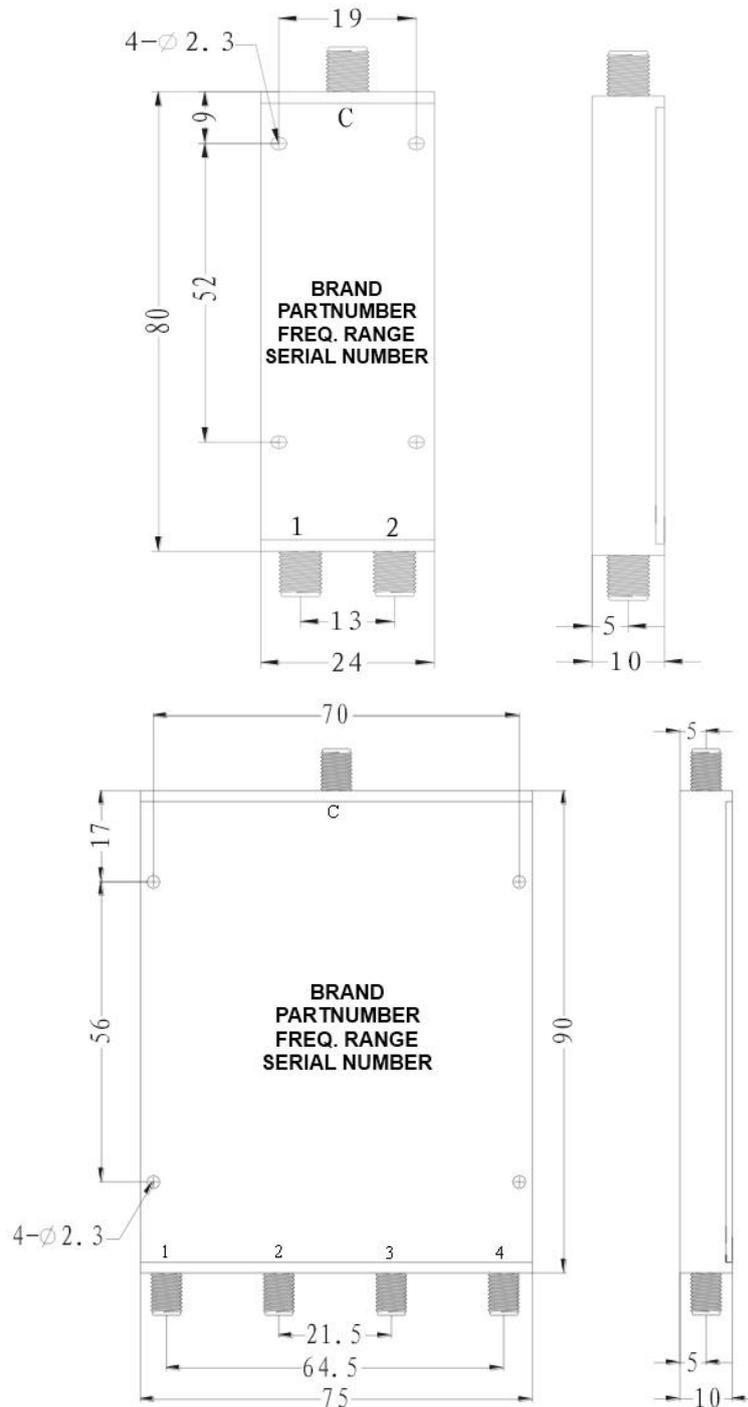

ATTENTION: THIS IS THE BASIC DRAWING, THE OUTLINE MAY VARY  
DEPENDING ON THE OPTIONS YOU CHOOSE FOR THE PRODUCT, PLEASE,  
CONSULT THE FACTORY

#6504, SHASAN ROAD, SHAJING TOWN, BAOAN DISTRICT, SHENZHEN, CHINA  
518104

BASIC CHARACTERISTICS (NORMALLY APPLICABLE TO THE SERIES):

Impedance (Ohms) - 50Ω

Input Connector – SMA type

Output Connector – SMA type

Finishing – Protective paint

Material - Aluminum

Seal - Hermetically Sealed

**Environment specifications:**

Operational Temperature (C°) - -55 ~ +85

Storage Temperature (C°) -55 ~ +125

Altitude - 30,000 ft (In controlled environment)

Vibration - 25g rms (15 degree 2KHz)

Humidity - 100% RH at 35c, 95%RH at 40 deg c

Shock - 20G for 11msc